

VITLIFE

COMMERCIAL REFRIGERATION LINEUP

About Us

As a Food Service Establishment Owner and Professional, what do you lose sleep over: Equipment breakdowns or malfunction as that drives a wedge in the smooth operations of any restaurant, cafeteria, canteen, mom & pop store or supermarket . That' s where VITLIFE Commercial can play role of a trusted partner for you

VITLIFE Commercial is established by senior leaders in Industry and we have spent our entire life taking care of our customers. For us, your wish is our command. Professional product line that delivers when you need them most . Unrelenting durability and reliability, including Reach in Refrigerators & Freezers , pizza tables, chef bases , under counters , prep tables, Uprights, back bars , Merchandisers. You name it we have it

Our promise comes from who we are----- World class manufacturing facilities, state of the art equipment, leading product designers, laser focus on product innovation and quality, highly dependable logistics and order fulfillment processes which has led to strong global market presence and success in both mature and developing markets

All of this is possible through amazing teamwork where everyone is committed and contributes to your success. From shop floor operator to warehouse handler to our local technician and service partner , we leave no stone unturned in producing and bring to you best in class products which serve you wherever they are installed

We look forward to serving you in our best capacity as your success is our success

Reach-in Solid Door Refrigerator - Top-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Locks and keys included.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles & control panels available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- EC fan motor, lower energy consumption, less noise, higher efficiency.



VRT27R



VRT54R

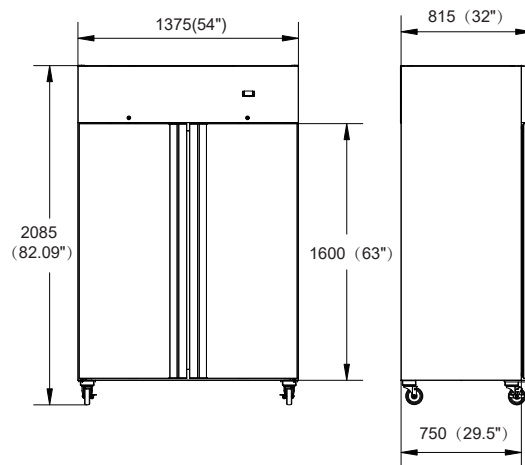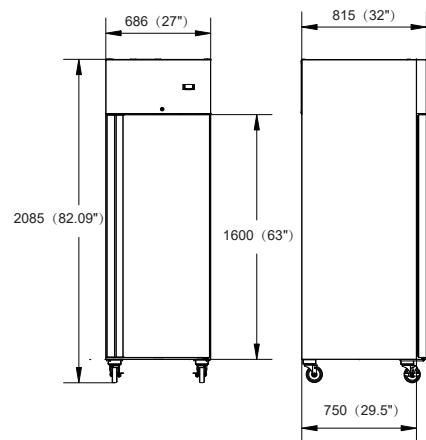

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VRT27R	1	3	27 *32 1/16*82 1/16 686*815*2085	594 21	1/5	1.7	115/60/1	5-15P
VRT54R	2	6	54 1/8*32 1/16*82 1/16 1375*815*2085	1302 46	1/4	2.1	115/60/1	5-15P



Reach-in Solid Door Refrigerator - Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Self-Closing doors with 90 degree stay-open feature.
- Locks and keys included.
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Option of different handles & control panels available.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre installed heavy-duty casters with brakes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- EC fan motor, lower energy consumption, less noise, higher efficiency.



VRB27R



VRB54R

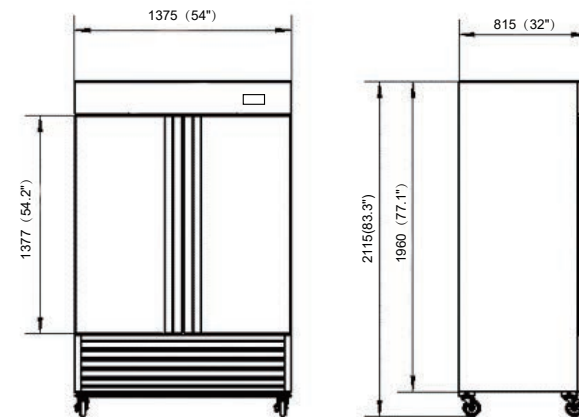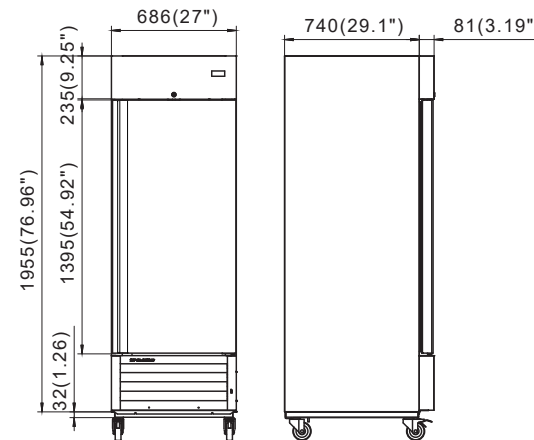

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VRB27R	1	3	27 *32 1/16*83 1/4 686*815*2115	594 21	1/5	1.7	115/60/1	5-15P
VRB54R	2	6	54 1/8*32 1/16*83 1/4 1375*815*2115	1302 46	1/4	2.1	115/60/1	5-15P



Reach-in Solid Door Freezer - Top-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between -8 ℉ and 0 ℉ (-22 ℃ to -18 ℃).
 - Self-Closing doors with 90 degree stay-open feature.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Option of different handles & control panels available.
 - Hot pipe anti-consensation, not just in the door frame, but also in the middle vertical mullion, instead of the electric wire heater, more safe, more energy saving.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
 - EC fan motor, lower energy consumption, less noise, higher efficiency.
 - Locks and keys included.
 - LED lighting.




VRT27F



VRT54F

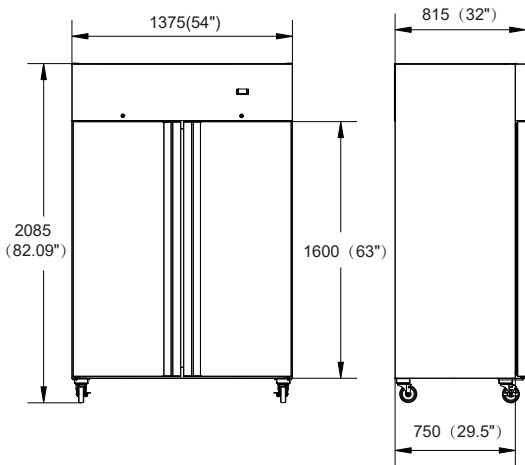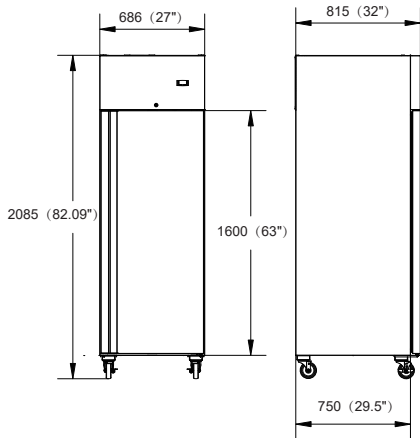

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VRT27F	1	3	27 *32 1/16*82 1/16 686*815*2085	594 21	1/3		115/60/1	5-15P
VRT54F	2	6	54 1/8*32 1/16*82 1/16 1375*815*2085	1302 46	1/2		115/60/1	5-15P



Reach-in Solid Door Freezer - Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between -8 ℉ and 0 ℉ (-22 ℃ to -18 ℃).
 - Self-Closing doors with 90 degree stay-open feature.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Option of different handles & control panels available.
 - Hot pipe anti-consensation, not just in the door frame, but also in the middle vertical mullion, instead of the electric wire heater, more safe, more energy saving.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
 - EC fan motor, lower energy consumption, less noise, higher efficiency.
 - Locks and keys included.
 - LED lighting.




VRB27F



VRB54F

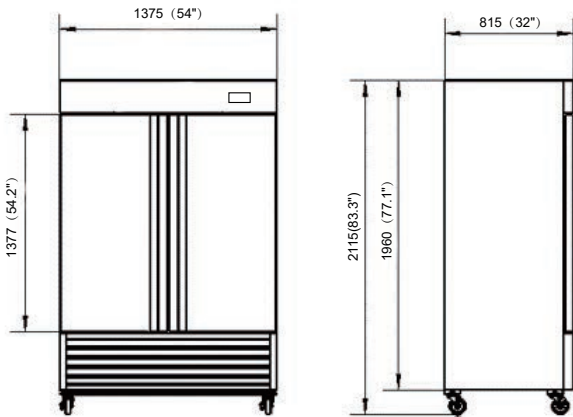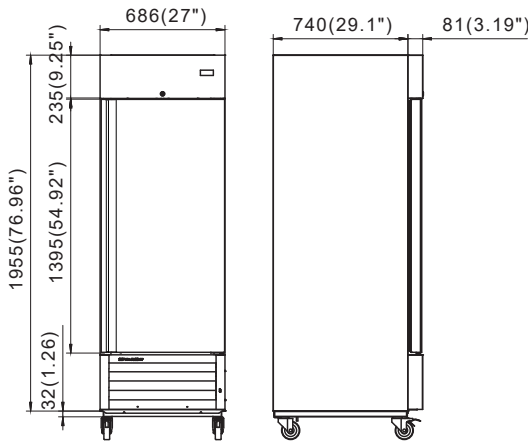

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VRB27F	1	3	27 *32 1/16*83 1/4 686*815*2115	594 21	1/3	2.9	115/60/1	5-15P
VRB54F	2	6	54 1/8*32 1/16*83 1/4 1375*815*2115	1302 46	1/2	5	115/60/1	5-15P



Reach-in Glass Door Refrigerator - Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
 - Self-Closing doors with 90 degree stay-open feature.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Door with 2 layers' tempered glass.
 - New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - EC fan motor, lower energy consumption, less noise, higher efficiency.
 - Locks and keys included.
 - LED lighting.




VRB27RG



VRB54RG

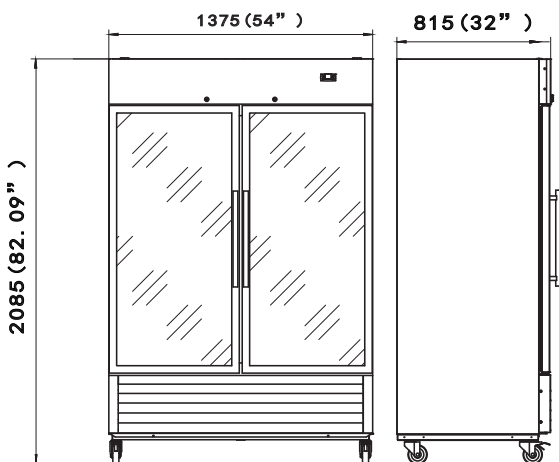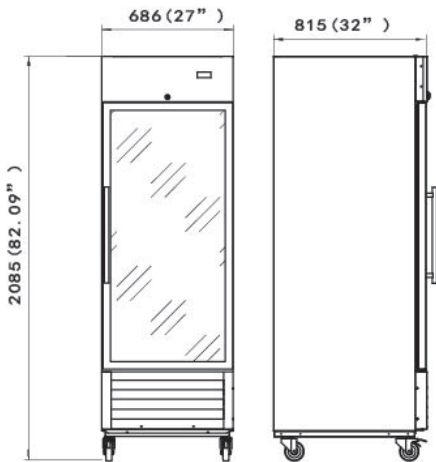

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VRB27RG	1	3	27 *32 1/16*83 1/4 686*815*2115	594 21	1/5	2	115/60/1	5-15P
VRB54RG	2	6	54 1/8*32 1/16*83 1/4 1375*815*2115	1302 46	1/4	2.5	115/60/1	5-15P



Reach-in Glass Door Freezer- Bottom-Mounted Series



- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between -8°F and 0°F (-22 °C to -18°C).
 - Self-Closing doors with 90 degree stay-open feature.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - 3 layers' tempered glass door with heater.
 - New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - EC fan motor, lower energy consumption, less noise, higher efficiency.
 - Locks and keys included.
 - LED lighting.




VRB27FG



VRB54FG

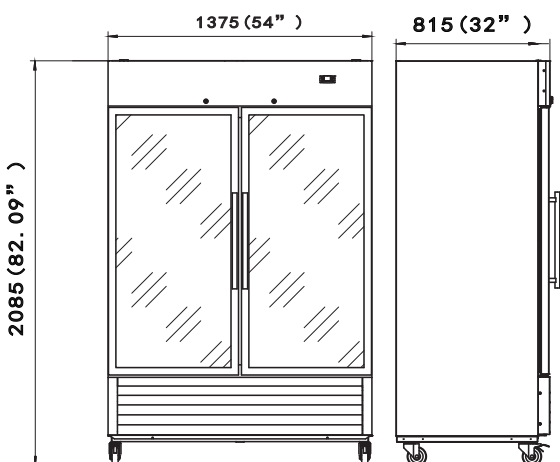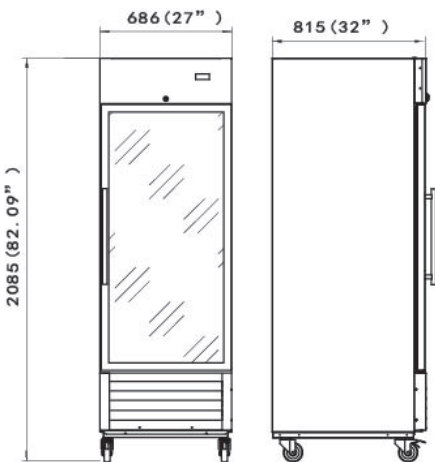


MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VRB27FG	1	3	27 *32 1/16*83 1/4 686*815*2115	594 21	1/3	3.2	115/60/1	5-15P
VRB54FG	2	6	54 1/8*32 1/16*83 1/4 1375*815*2115	1302 46	1/2	5.3	115/60/1	5-15P




Undercounter Refrigerator - NUC Series

- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between 33°Fand 41°F(0.5 °Cto 5°C).
 - Self-Closing doors with 90 degree stay-open feature.
 - With door switch, fan stops when door is opened, energy saving.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - EC fan motor, lower energy consumption, less noise, higher efficiency.
 - Option of Backsplashes available.
 - Option of different handles .

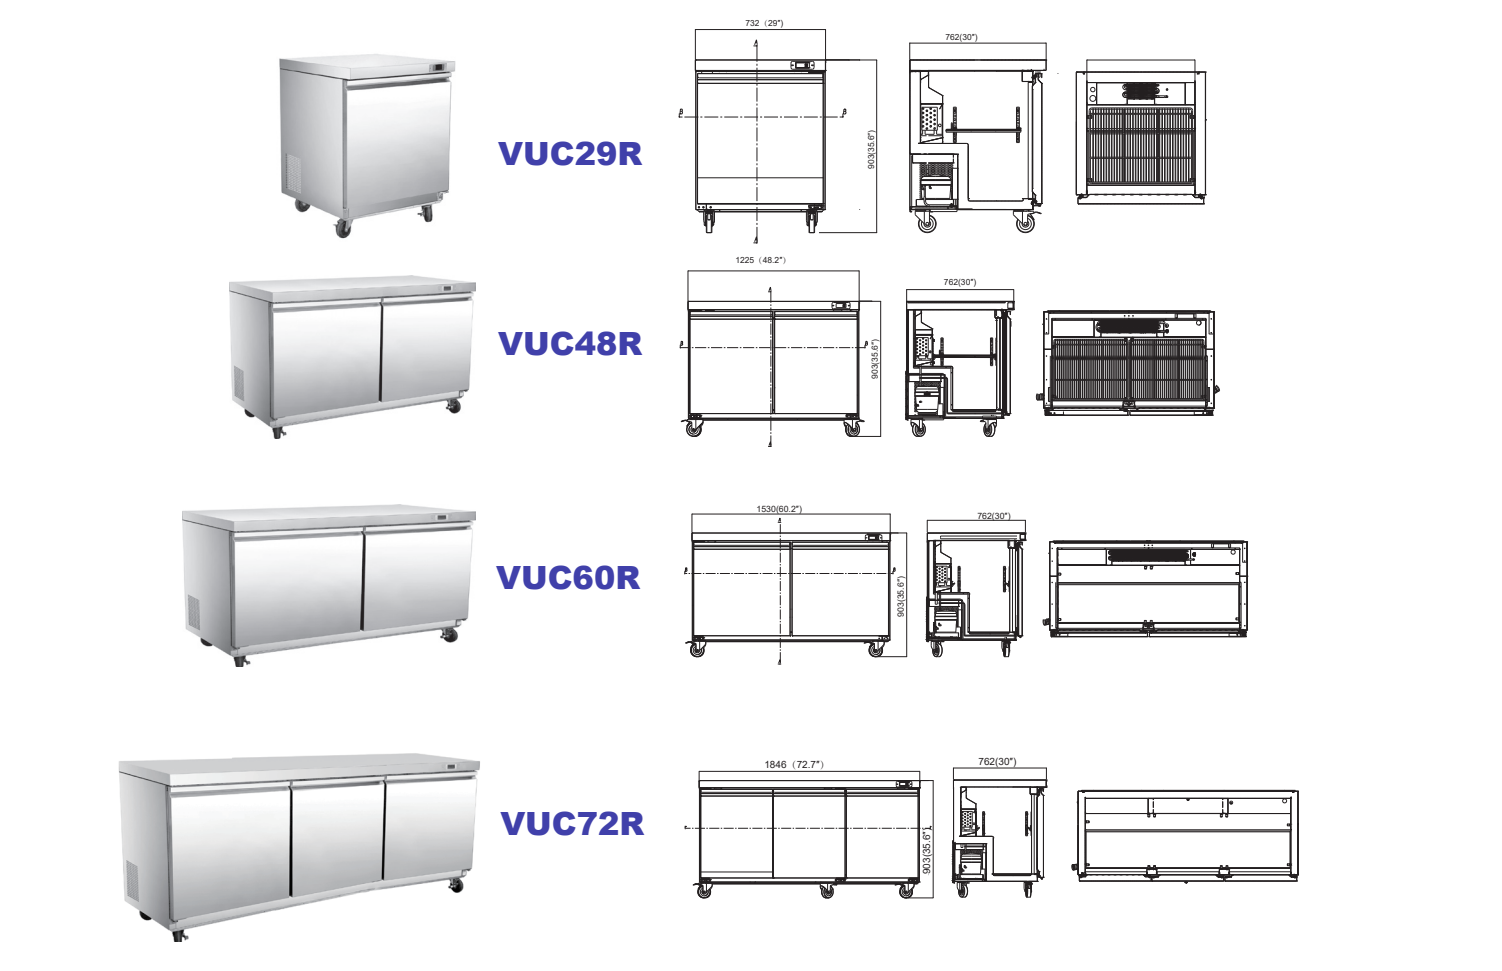


MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VUC29R	1	1	29*30*35 9/16 732*762*903	6.7 190	1/5	1.7	115/60/1	5-15P
VUC48R	2	2	48 1/4*30*35 9/16 1225*762*903	11.1 314	1/5	1.7	115/60/1	5-15P
VUC60R	2	2	60 1/4*30*35 9/16 1530*762*903	14.1 399	1/4	2.1	115/60/1	5-15P
VUC72R	3	3	72 11/16*30*35 9/16 1846*762*903	16.6 470	1/4	2.1	115/60/1	5-15P



Undercounter Freezer- NUC Series

- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between -8°Fand 0°F(-22 °Cto -18°C).
 - Self-Closing doors with 90 degree stay-open feature.
 - With door switch, fan stops when door is opened, energy saving.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Option of different handles .
 - Pre installed heavy-duty casters with brakes.
- Hot pipe anti-consensation, not just in the door frame, but also in the middle vertical mullion, instead of the electric wire heater, more safe, more energy saving.
 - EC fan motor, lower energy consumption, less noise, higher efficiency.
 - Option of Backsplashes available.
 - Electronic control system makes it easy to adjust temperature set point and defrost frequency.

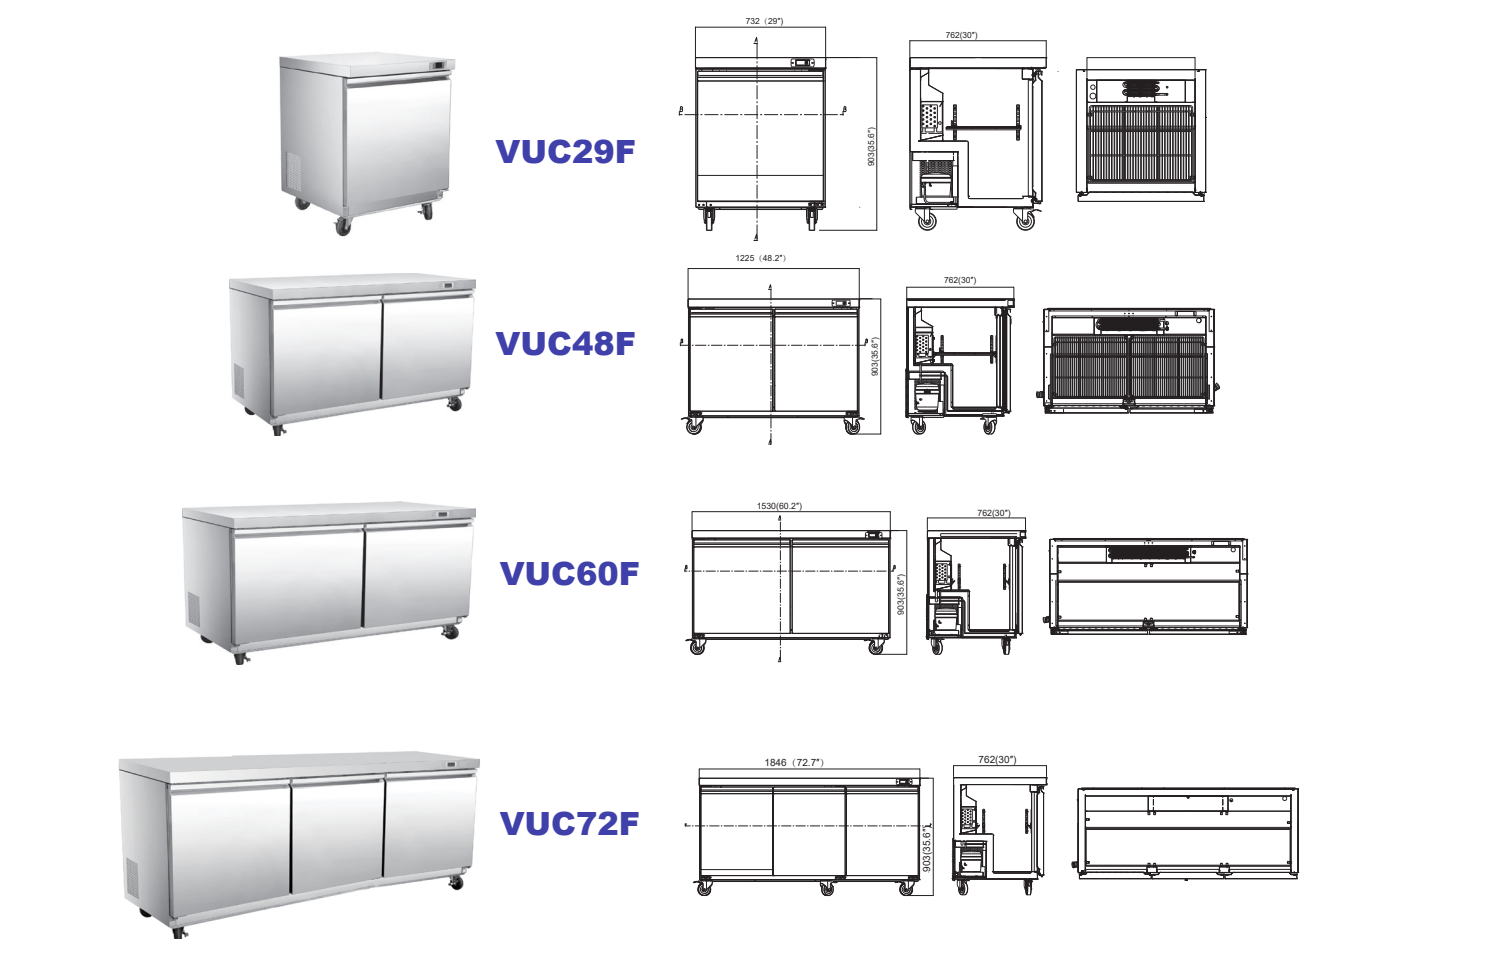


MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VUC29F	1	1	29*30*35 9/16 732*762*903	6.7 190	1/5	1.7	115/60/1	5-15P
VUC48F	2	2	48 1/4*30*35 9/16 1225*762*903	11.1 314	1/3	2.9	115/60/1	5-15P
VUC60F	2	2	60 1/4*30*35 9/16 1530*762*903	14.1 399	1/3	2.9	115/60/1	5-15P
VUC72F	3	3	72 11/16*30*35 9/16 1846*762*903	16.6 470	1/2	4.1	115/60/1	5-15P




Sandwich/Salad Prep Table

- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between 33°Fand 41°F(0.5 °Cto 5°C).
 - Self-Closing doors with 90 degree stay-open feature.
 - Cutting boards and pans available.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Option of different handles .
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - With door switch, fan stops when door is opened, energy saving.
 - EC fan motor, lower energy consumption, less noise, higher efficiency.

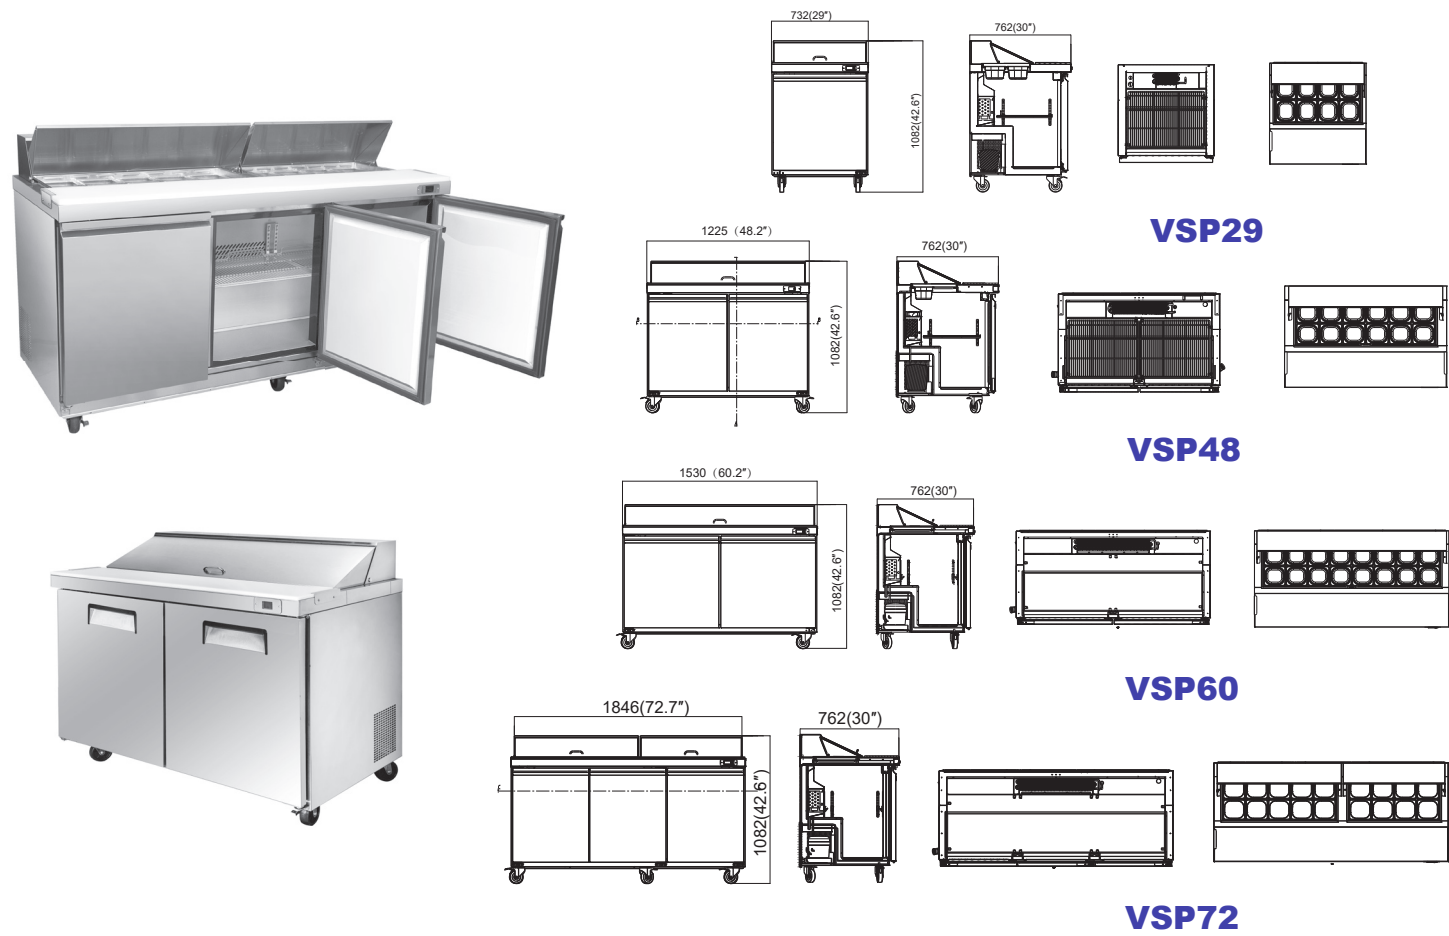


MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VSP29	1	1	29*30*42 5/8 732*762*1082	7.6 215	1/5	1.7	115/60/1	5-15P
VSP48	2	2	48 1/4*30*42 5/8 1225*762*1082	13.8 390	1/5	1.7	115/60/1	5-15P
VSP60	2	2	60 1/4*30*42 5/8 1530*762*1082	17.8 505	1/4	2.1	115/60/1	5-15P
VSP72	3	3	72 11/16*30*42 5/8 1846*762*1082	21.2 601	1/4	2.1	115/60/1	5-15P




Mega top Sandwich/Salad Prep Table

- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between 33°Fand 41°F(0.5 °Cto 5°C).
 - Self-Closing doors with 90 degree stay-open feature.
 - Cutting boards and pans available.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Option of different handles .
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - With door switch, fan stops when door is opened, energy saving.
 - EC fan motor, lower energy consumption, less noise, higher efficiency.

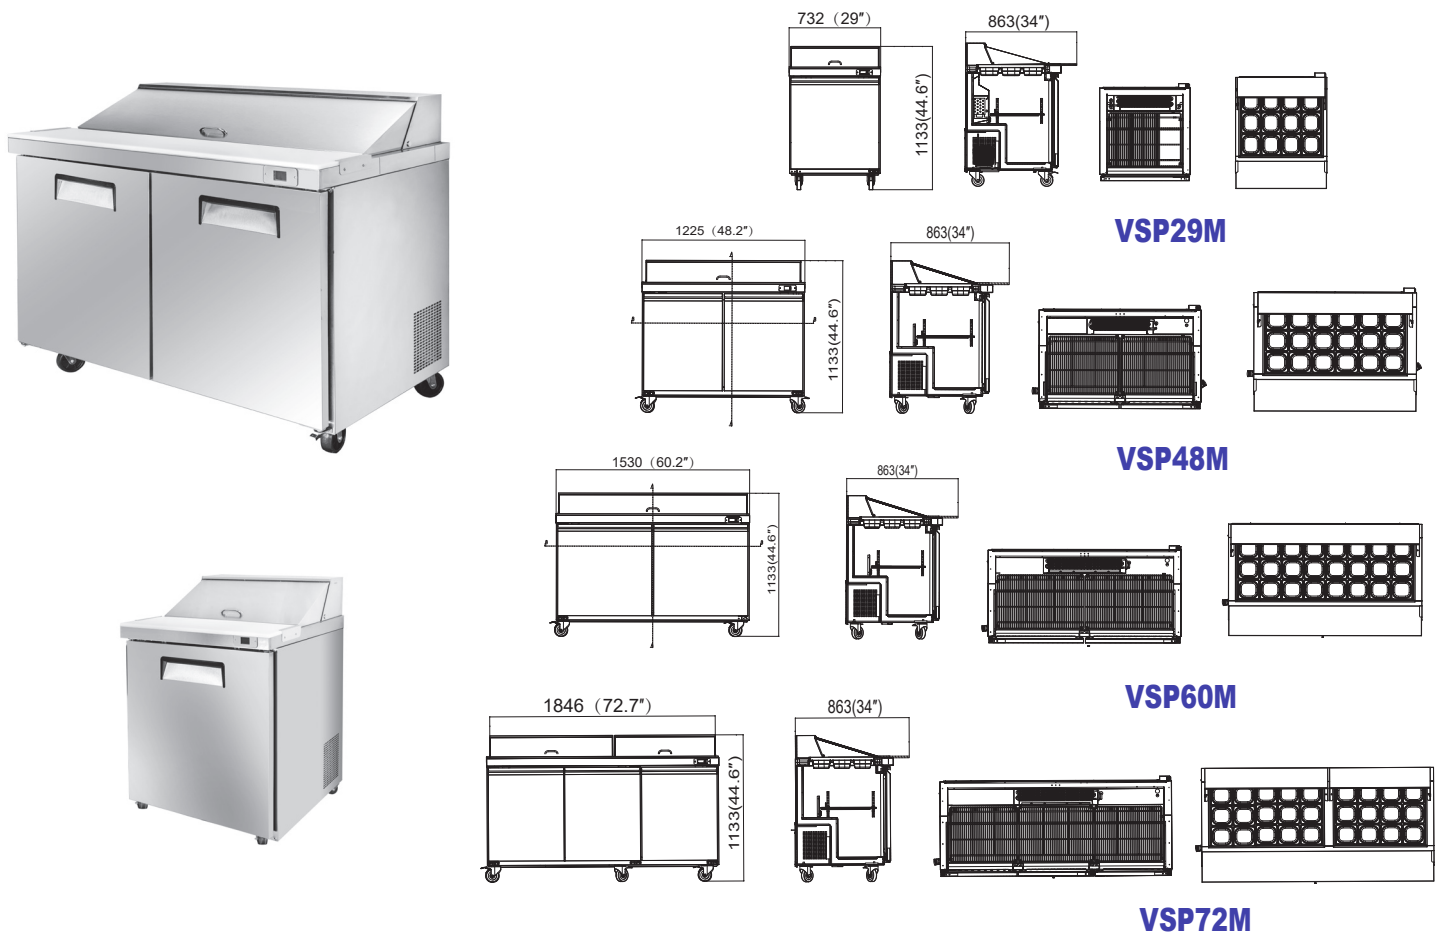


MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VSP29M	1	1	29*30*42 5/8 732*762*1082	7.6 215	1/5	1.7	115/60/1	5-15P
VSP48M	2	2	48 1/4*30*42 5/8 1225*762*1082	13.8 390	1/5	1.7	115/60/1	5-15P
VSP60M	2	2	60 1/4*30*42 5/8 1530*762*1082	17.8 505	1/4	2.1	115/60/1	5-15P
VSP72M	3	3	72 11/16*30*42 5/8 1846*762*1082	21.2 601	1/4	2.1	115/60/1	5-15P




Pizza Prep Table

- Stainless steel interior and exterior, Galvanized sheet back.
 - Refrigeration system keeps food at safe temperature between 33°Fand 41°F(0.5 °Cto 5°C).
 - Self-Closing doors with 90 degree stay-open feature.
 - Cutting boards and pans available.
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Option of different handles .
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Pre installed heavy-duty casters with brakes.
 - With door switch, fan stops when door is opened, energy saving.
 - EC fan motor, lower energy consumption, less noise, higher efficiency.

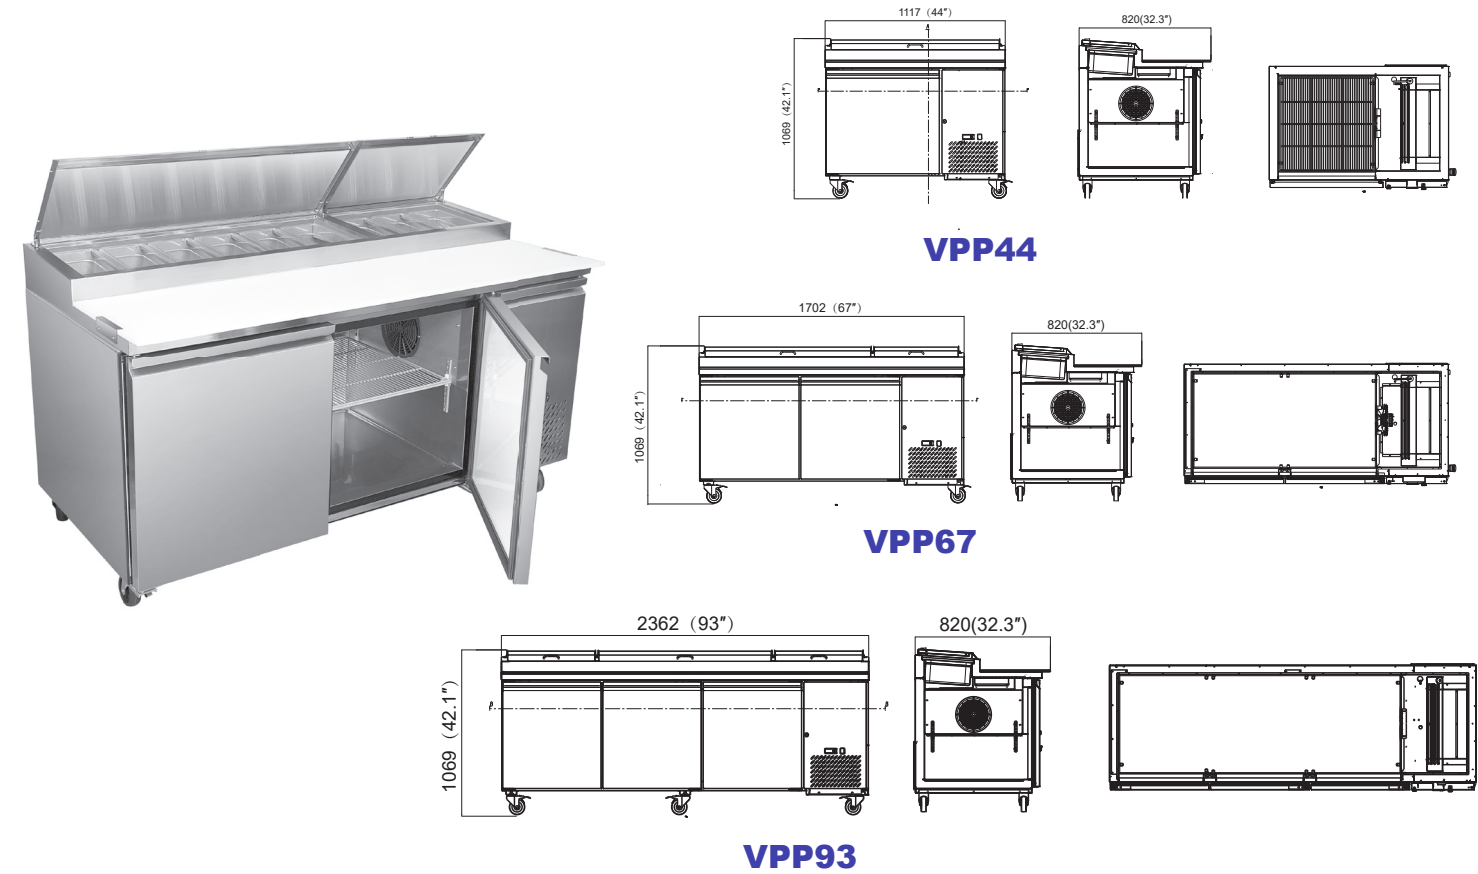


MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VPP44	1	1	44*32 5/16*42 1/16 1142*880*1136	10.9 310	1/5	1.7	115/60/1	5-15P
VPP67	2	2	67 *32 5/16*42 1/16 1727*880*1136	20.9 592	1/3	2.9	115/60/1	5-15P
VPP93	3	3	93*32 5/16*42 1/16 2387*880*1136	30.8 872	1/2	4.1	115/60/1	5-15P




Chef Base Refrigerator

- Stainless steel interior and exterior, Galvanized sheet back.
 - Stainless steel top equipped with a marine edge enables the unit's top to contain drips and spills for easy cleanup.
 - Refrigeration system keeps food at safe between 33°Fand 41°F(0.5 °Cto 5°C).
 - Preinstalled heavy-duty casters with brakes.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - With door switch, fan stops when door is opened, energy saving.
 - Heavy-duty pull handles.

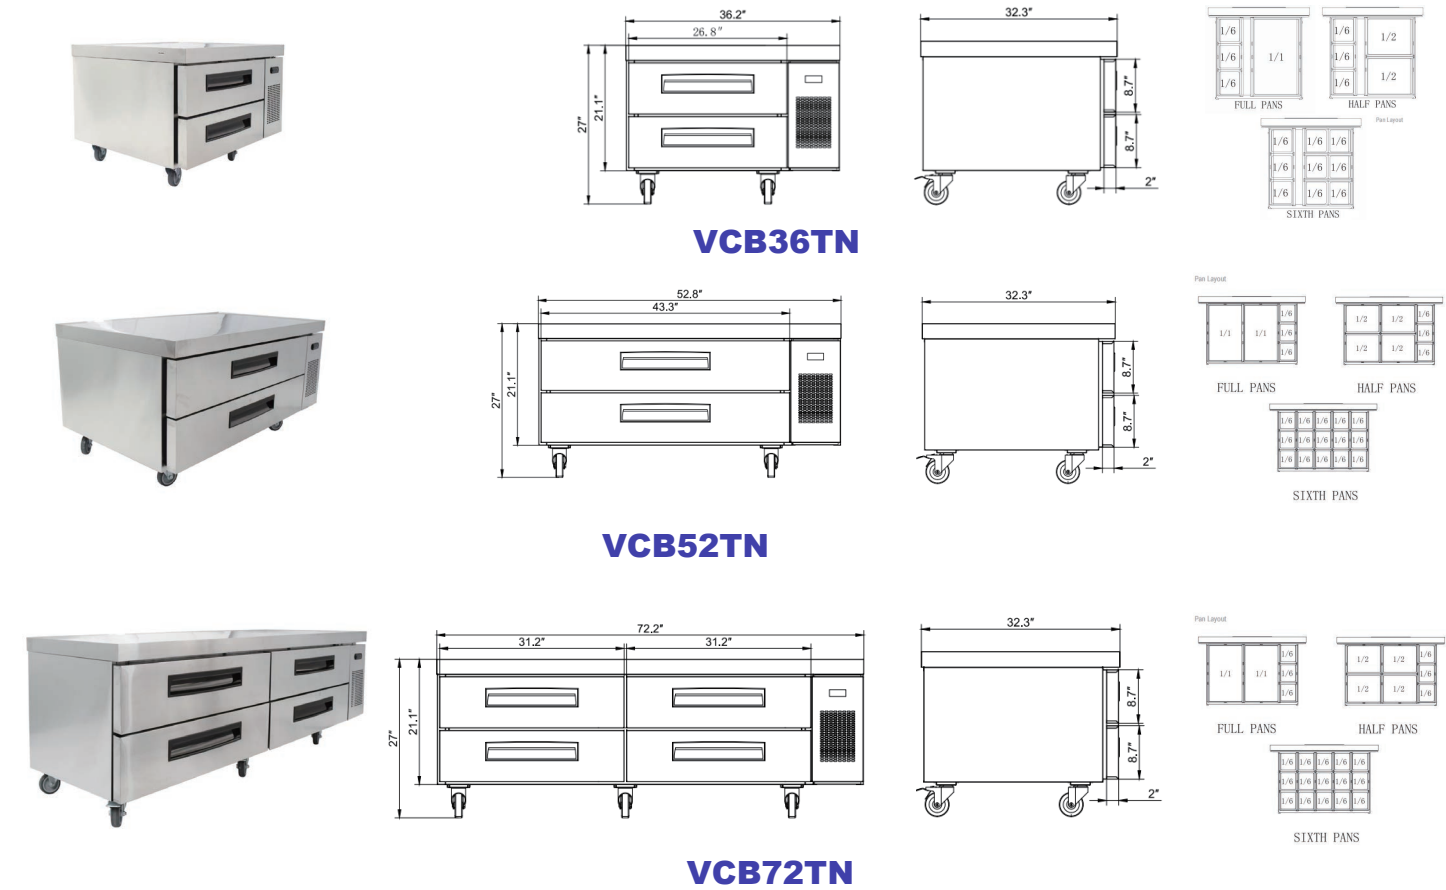


MODEL	DOORS	GN PANS FOR EVERY DRAWER	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VCB36TN	2	3*1/6+1*1/1 or 3*1/6+2*1/2 or 9*1/6	44*32 5/16*42 1/16 1142*880*1136	10.9 310	1/5	2.6	115/60/1	5-15P
VCB52TN	2	3*1/6+2*1/1 or 3*1/6+4*1/2 or 15*1/6	67 *32 5/16*42 1/16 1727*880*1136	20.9 592	1/5	2.7	115/60/1	5-15P
VCB72TN	4	3*1/6+2*1/1 or 3*1/6+4*1/2 or 15*1/6	93*32 5/16*42 1/16 2387*880*1136	30.8 872	1/5	3.1	115/60/1	5-15P



Refrigerated Topping Unit

- Interior and exterior stainless steel material for high level product.
- High quality famous compressor.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Accept GN1/6 pans rangege.
- CFC free foaming.
- Agjustable feet.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °Cto 5°C).

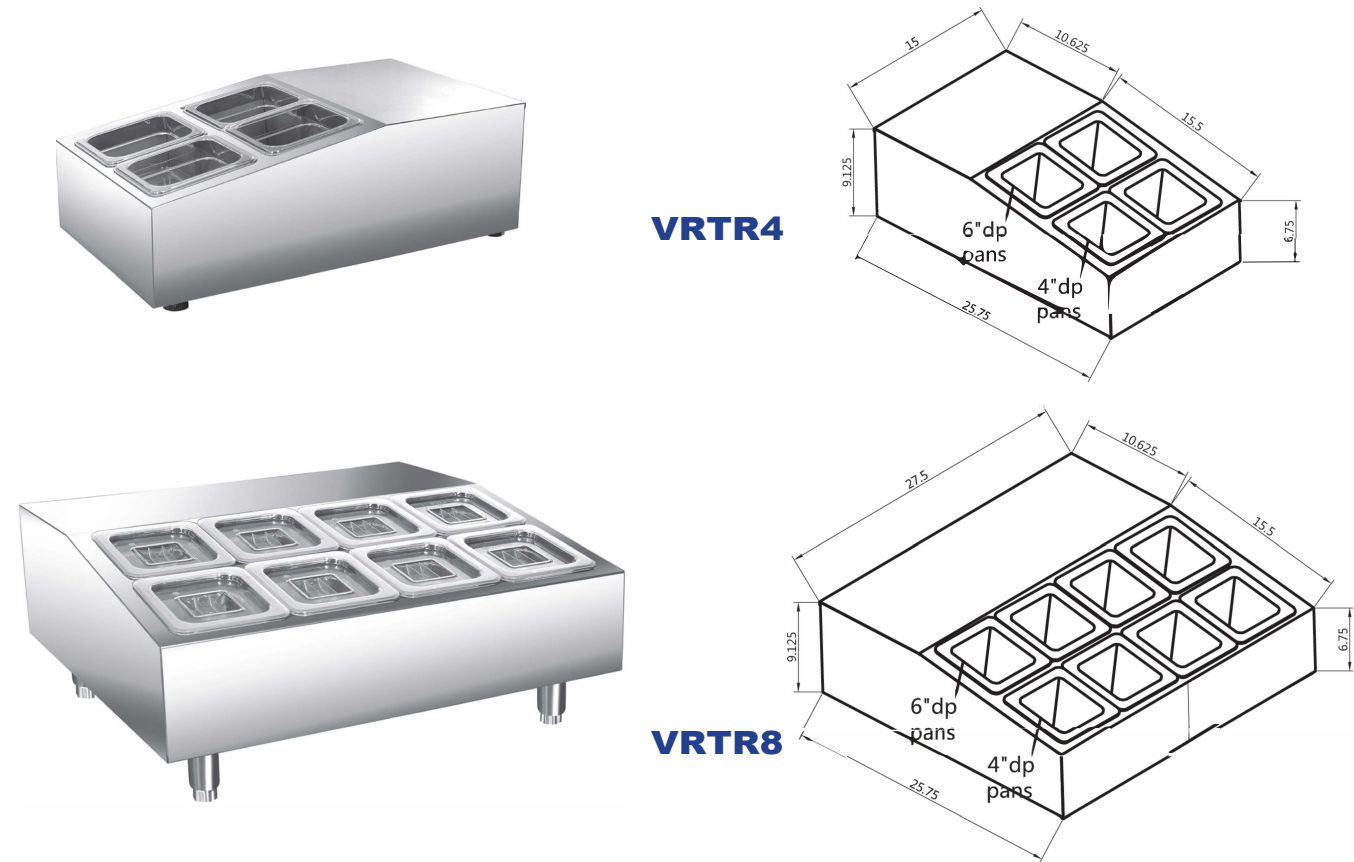

MODEL	GN PANS	DIMENSION(WxDxH) inches mm	HP	AMPS	VOLTAGE	PLUG TYPE
VRTR4	GN1/6*4	14 15/16*25 13/16*9 5/16 379*656*236	1/5	1.4	115/60/1	5-15P
VRTR8	GN1/6*8	27 1/2*25 13/16*9 5/16 699*656*236	1/5	1.4	115/60/1	5-15P



VRX

- Interior and exterior stainless steel material for high level product.
- High quality famous compressor.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- CFC free foaming.
- Agjustable feet.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °Cto 5°C).
- Option of stainless steel lid or glass lid.



MODEL	GN PANS	DIMENSION(WxDxH) inches mm	HP	AMPS	VOLTAGE	PLUG TYPE
VVRX1200/380G/S	GN1/3*3+ GN1/2*1	47 1/4*15 1/2*17 1/8 1200*395*435	1/5	1.4	115/60/1	5-15P
VVRX1500/380G/S	GN1/3*5+ GN1/2*1	59*15 1/2*17 1/8 1500*395*435	1/5	1.4	115/60/1	5-15P
VVRX2000/380G/S	GN1/3*9	78 3/4*15 1/2*17 1/8 2000*395*435	1/5	1.4	115/60/1	5-15P



Upright Ventilated Refrigerator

- Exterior: white ,with the coated steel or black as the optional.
- Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °Cto 5°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Soft-closing door with 90 degree stay-open features.
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed heavy duty casters with the brackes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- The door can be reversed left and right.
- Option of top LED lighting



MODEL	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VBR200VW	3	23 3/8*25 3/4*34 5/8 595x655x880	4 115	1/5	1.5	115/60/1	5-15P
VBR400VW	5	23 3/8*26 1/8*74 1/8 595x662x1882	10.4 293	1/5	1.5	115/60/1	5-15P
VBR600VW	5	30 1/2*30*74 1/8 775x762x1882	18 510	1/4	2.0	115/60/1	5-15P

Upright Ventilated Freezer

- Exterior: white, with the coated steel or black as the optional.
- Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between -8°F and 0°F (-22 °Cto -18°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Soft-closing door with 90 degree stay-open features.
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed heavy duty casters with the brackes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency
- The door can be reversed left and right.
- Option of top LED lighting




MODEL	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VBF200VW	3	23 3/8*25 3/4*34 5/8 595x655x880	4 115	1/5	1.9	115/60/1	5-15P
VBF400VW	5	23 3/8*26 1/8*74 1/8 595x662x1882	10.4 293	1/3	3.3	115/60/1	5-15P
VBF600VW	5	30 1/2*30*74 1/8 775x762x1882	18 510	1/2	5.5	115/60/1	5-15P

Upright Ventilated Refrigerator-Glass door

- Exterior: white ,with the coated steel or black as the optional.
- Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °Cto 5°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Soft-closing door with 90 degree stay-open features .
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre-installed heavy duty casters with the brackes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency.
- Top LED lighting.
- Aluminum alloy door frame and 2 layers' tempered glass.




MODEL	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VBR200VGW	3	23 3/8*25 3/4*34 5/8 595x655x880	4 115	1/6	1.5	115/60/1	5-15P
VBR400VGW	5	23 3/8*26 1/8*74 1/8 595x662x1882	10.4 293	1/6	1.5	115/60/1	5-15P
VBR600VGW	5	30 1/2*30*74 1/8 775x762x1882	18 510	1/5	2.0	115/60/1	5-15P



Upright Ventilated Freezer-Glass door serie

- Exterior: white, with the coated steel or black as the optional.
- Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between -8°F and 0°F (-22 °Cto -18°C)
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Soft-closing doors with 90 degree stay-open features.
- Locks and keys included.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- Pre Installed heavy duty casters with the brackes.
- New circulating air system, new designed air duct make the little temperature difference between top and bottom, better cooling efficiency.
- Top LED lighting.
- Aluminum alloy door frame and 3 layers' tempered glass with heater.

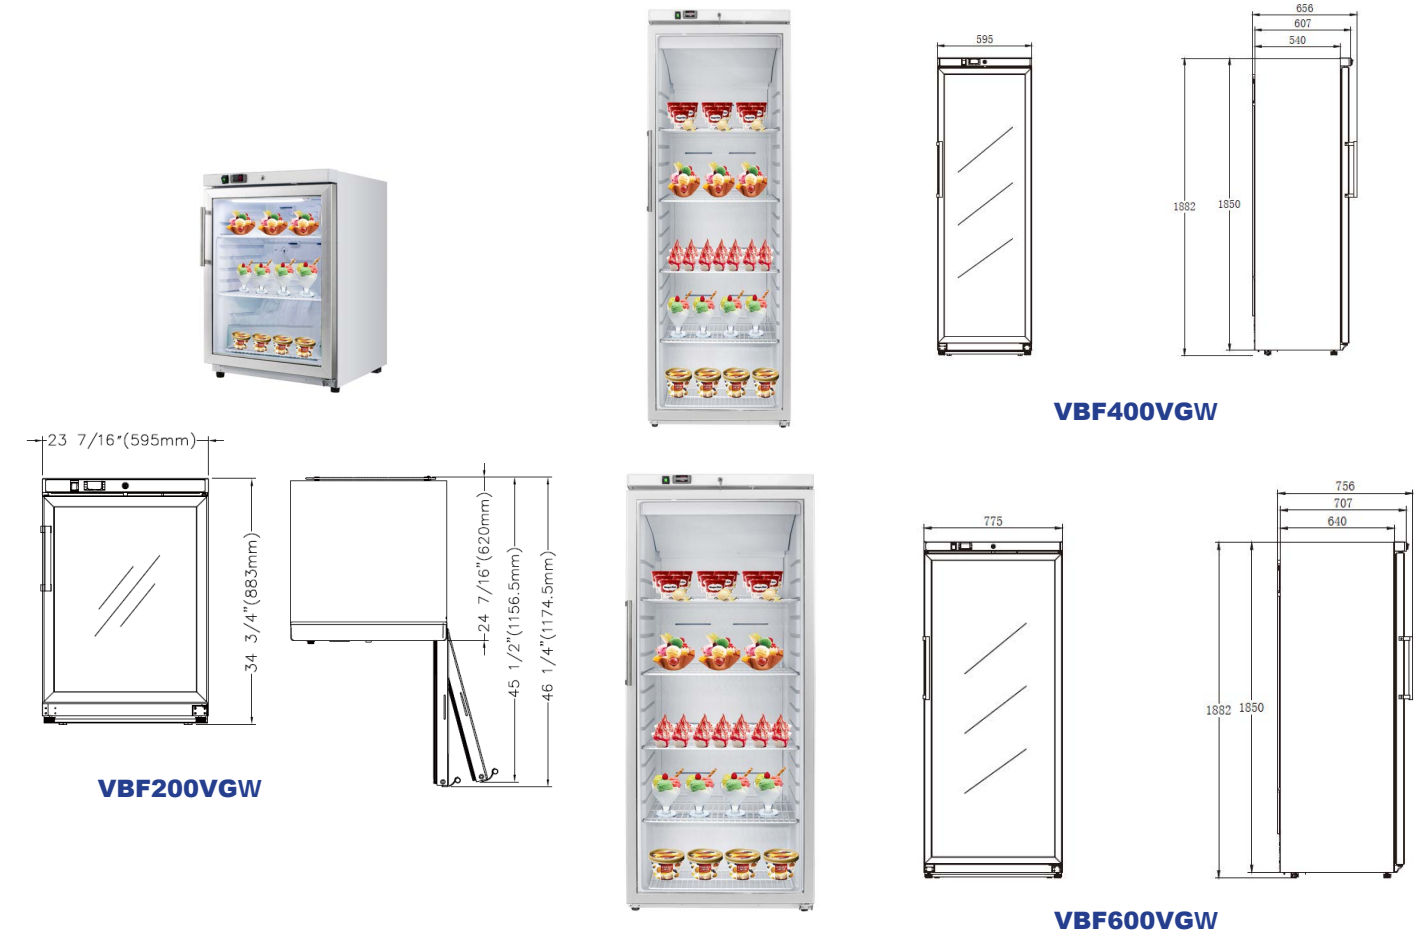


MODEL	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VBF200VGW	3	23 3/8*25 3/4*34 5/8 595x655x880	4 115	1/5	2.3	115/60/1	5-15P
VBF400VGW	5	23 3/8*26 1/8*74 1/8 595x662x1882	10.4 293	1/3	3.3	115/60/1	5-15P
VBF600VGW	5	30 1/2*30*74 1/8 775x762x1882	18 510	1/2	5.7	115/60/1	5-15P




Back Bar cooler-Swing doors series

- Exterior: black finish.
 - Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
 - Refrigeration system keeps food at safe temperature between 36°F and 50°F (2 °C to 10°C).
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - TOP LED lighting.
 - Soft-closing doors with 90 degree stay-open features
 - Locks and keys included.

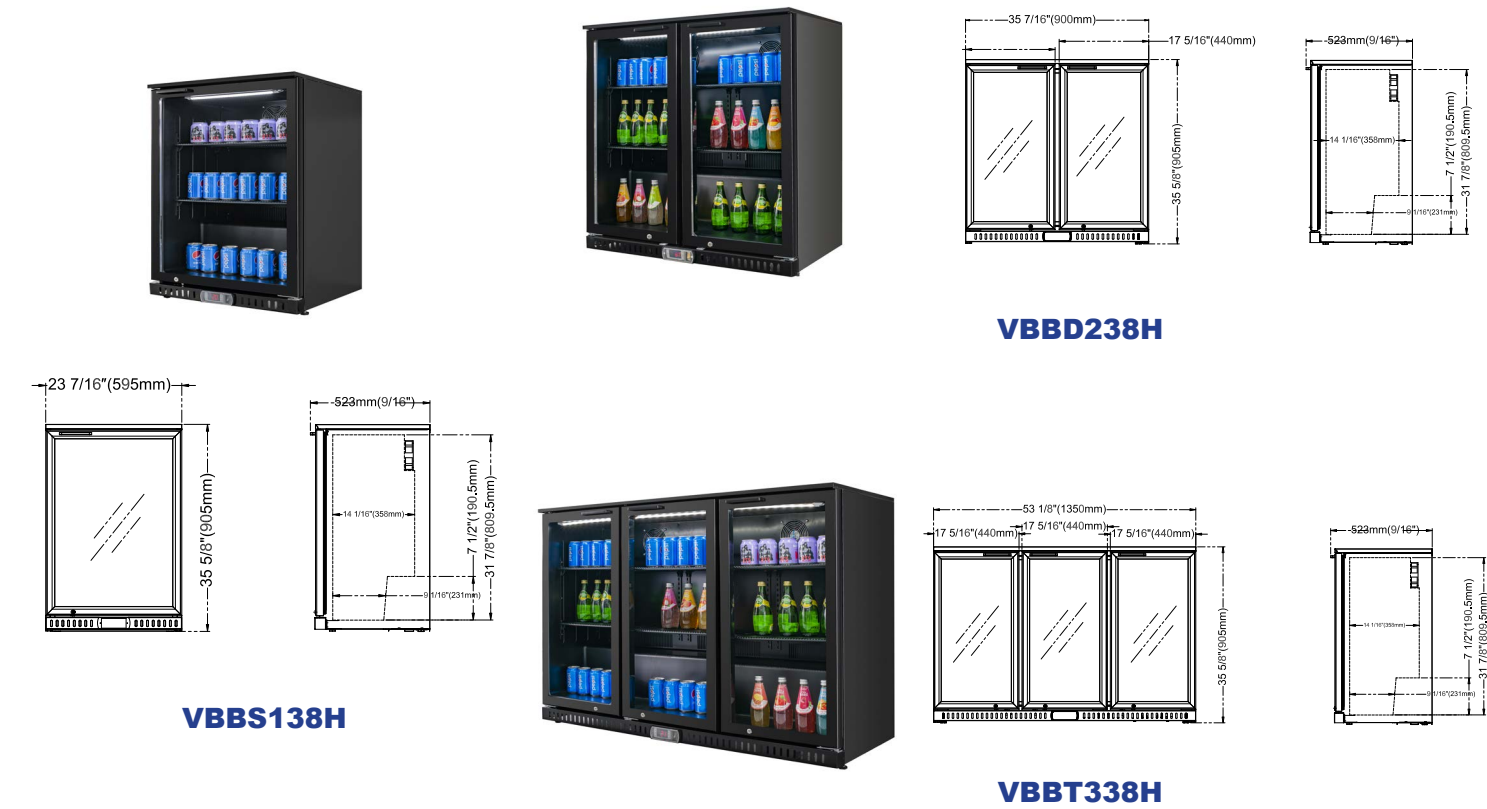


MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VBBS138H	1	2	23 5/8*20 1/2*35 3/8 600×520×900	4.7 134	1/5	0.9	115/60/1	5-15P
VBBD238H	2	4	35 3/8*20 1/2*35 3/8 900×520×900	7.5 212	1/5	1.4	115/60/1	5-15P
VBBT338H	3	6	53 1/8*20 1/2*35 3/8 1350×520×900	11.6 328	1/4+	2.1	115/60/1	5-15P



Back Bar cooler-Sliding doors series

- Exterior: black finish .
 - Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
 - Refrigeration system keeps food at safe temperature between 36°F and 50°F (2 °C to 10°C).
 - Shelves: Adjustable heavy-duty epoxy coated shelves.
 - Glass doors self-closing by gravity.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
 - Top LED lighting.
 - Locks and keys included.

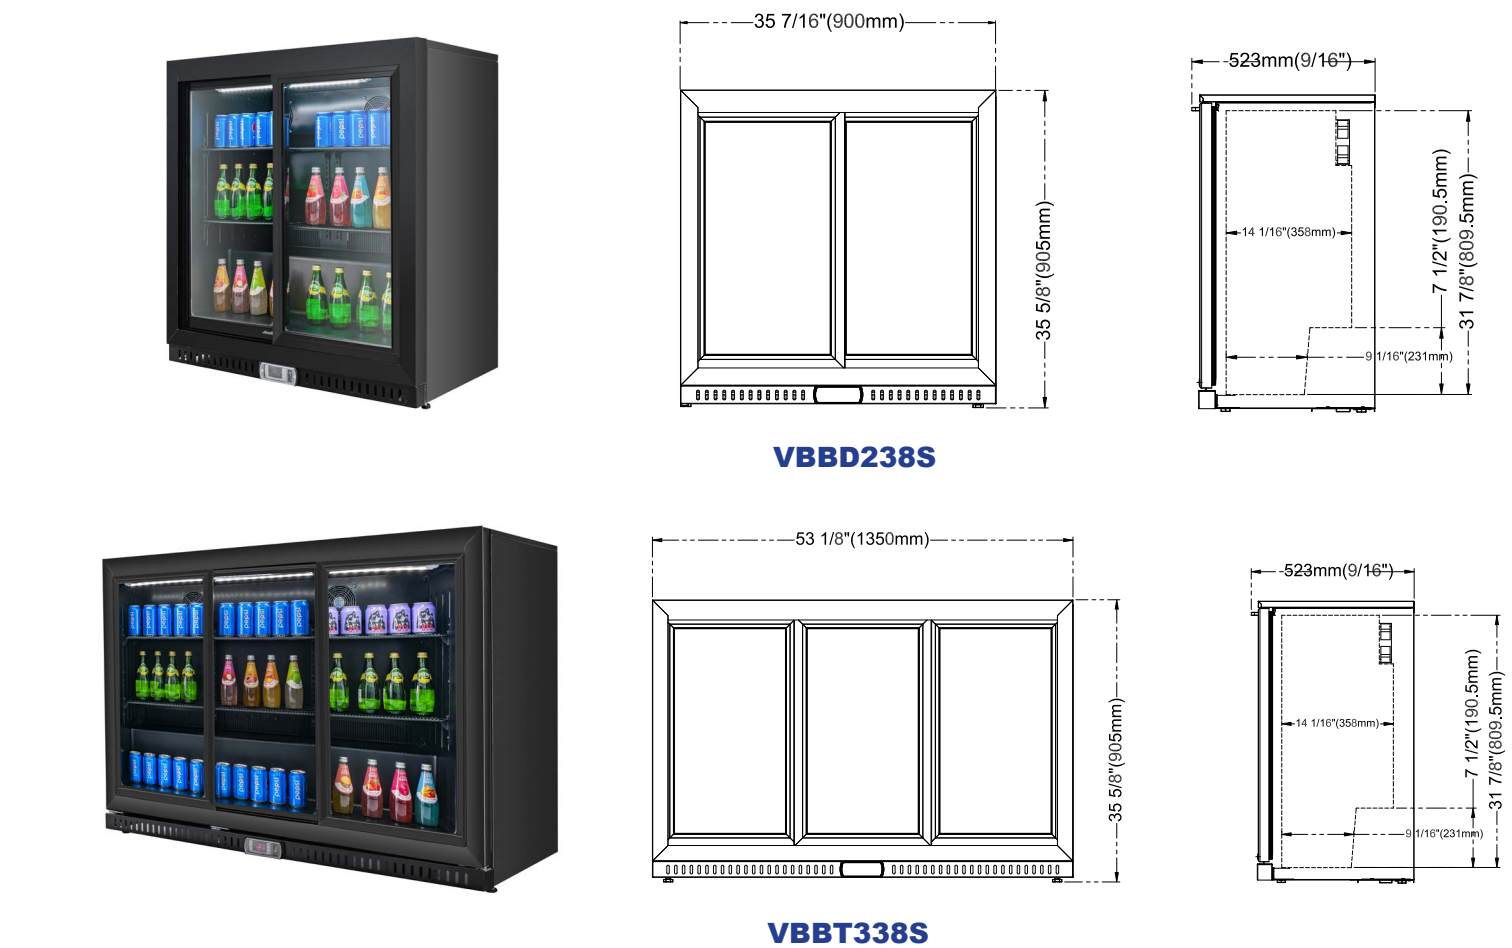

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VBBD238S	2	4	35 3/8*20 1/2*35 3/8 900×520×900	7.5 212	1/5	1.4	115/60/1	5-15P
VBBT338S	3	6	53 1/8*20 1/2*35 3/8 1350×520×900	11.6 328	1/4+	2.1	115/60/1	5-15P




Glass door Merchandiser

- Ventilated cooling system, auto defrost.
- Exterior: white, with the coated steel or black finish as the optional .
- Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).




MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VSC188VCW	1	4	19 5/8*23 1/2*60 1/4 500×596×1531	6.4 181	1/5	2.2	115/60/1	5-15P
VSC198VTW	1	4	19 5/8*23 1/2*60 1/4 500×596×1531	6.6 188	1/5	2.2	115/60/1	5-15P
VSC288VCW	1	4	19 5/8*23 1/2*70 7/8 550×596×1801	8.8 249	1/5	2.3	115/60/1	5-15P
VSC298VTW	1	4	19 5/8*23 1/2*70 7/8 550×596×1801	9.1 258	1/5	2.3	115/60/1	5-15P
VSC388VCW	1	5	23 3/8*24 5/8*76 5/8 595×626×1946	12.3 348	1/5	2.4	115/60/1	5-15P
VSC398VTW	1	5	23 3/8*24 5/8*76 5/8 595×626×1946	12.6 356	1/5	2.4	115/60/1	5-15P
VSC488VCW	1	5	27 1/2*26 5/8*76 5/8 700×676×1946	16.5 468	1/5	2.6	115/60/1	5-15P
VSC498VTW	1	5	27 1/2*26 5/8*76 5/8 700×676×1946	16.9 478	1/5	2.6	115/60/1	5-15P



Glass Door Merchandiser

- Ventilated cooling system, auto defrost.
- Exterior: white, with the coated steel or black finish as the optional .
- Interior: Integrated Vacuum adsorption HIPS liner, easy to clean.
- Refrigeration system keeps food at safe temperature between 33°F and 41°F (0.5 °C to 5°C).
- Shelves: Adjustable heavy-duty epoxy coated shelves.
- Electronic control system makes it easy to adjust temperature set point and defrost frequency.
- LED lighting.
- Pre-installed heavy duty casters with brackets
- Soft-closing doors with 90 degree stay-open feature
- C- with the canopy; T - w/o the canopy

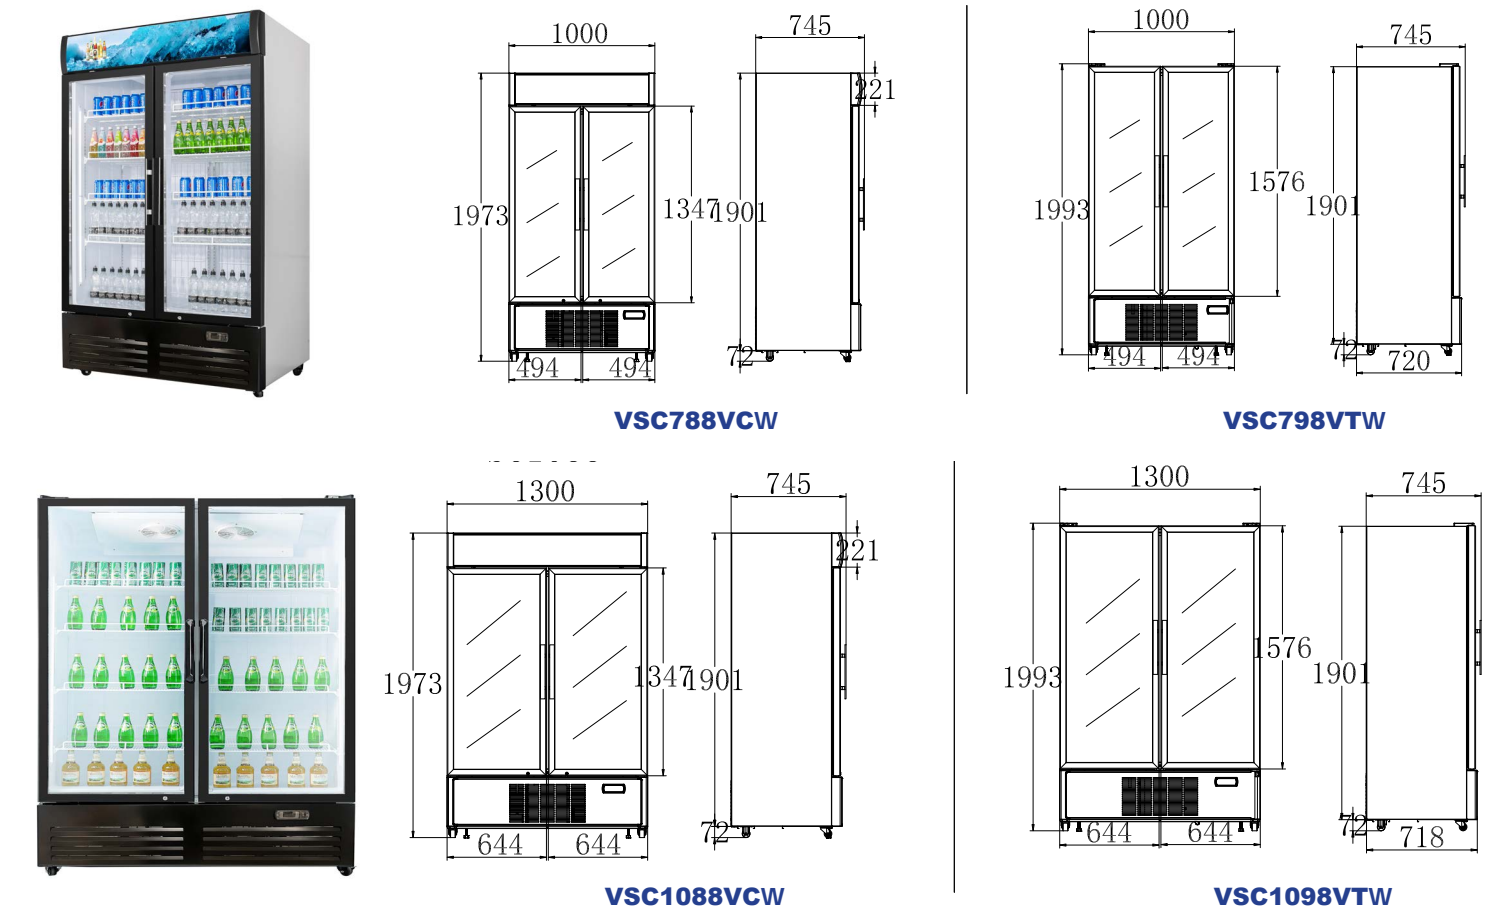

MODEL	DOORS	SHELVES	DIMENSION(WxDxH) inches mm	CAPACITY cu.ft. liters	HP	AMPS	VOLTAGE	PLUG TYPE
VSC788VCW	2	10	39 3/8*29 3/8*77 5/8 1000×745×1973	26 736	1/4+	6	115/60/1	5-15P
VSC798VTW	2	10	39 3/8*29 3/8*77 5/8 1000×745×1973	26.5 751	1/4+	6	115/60/1	5-15P
VSC1088VCW	2	10	51 1/8*29 3/8*77 5/8 1300×745×1973	35.3 1001	1/4+	6	115/60/1	5-15P
VSC1098VTW	2	10	51 1/8*29 3/8*77 5/8 1300×745×1973	36 1020	1/4+	6	115/60/1	5-15P

